

Array

Linear Pendant

The Array Pendant celebrates the inherent variations of timber through arrangements of handmade timber tiles. Designed for kitchen islands and commercial spaces.


Technical Details

Dimensions	73w x 57h (mm)
Lengths	Increments of 300mm - Up to 2.4m
Material	Solid Hardwood, Aluminium, Opal Acrylic, LED Lighting
CRI	90
Wattage	14.4W/m
Voltage	24V DC
Lumens	Approx. 1700lm per metre (Up + Down)
Install	Installed with a remote driver. Must be installed by a licensed electrician.
Dimming	Phase-Cut (Universal Dimming) DALI
Warranty	3 Years




Design	Array	AR
Length	900mm	L9
	1200mm	L12
	1500mm	L15
	1800mm	L18
	2100mm	L21
	2400mm	L24
Timber	Walnut	WA
	Rock Maple	MA
	American Oak	AO
	American Oak - Black Finish	AOB
	American Oak - White Oil Finish	AOO
	Tasmanian Blackwood	TB
	Tasmanian Oak	TO
	Spotted Gum	SG
	Custom Tint Colour	TINT
	LED Colour Temperature	2700K
3000K		3K
4000K		4K
Dimming Type	Phase-Cut (Standard)	PH
	DALI	DD
Ceiling Plate	Small Plate Ø76	76
	Large Plate Ø106	106
Ceiling Plate & Rod Colour	Black	B
	White	W
	Gold Pearl	GP
	Pale Bronze	PB
	Medium Bronze	MB
	Aged Brass	AB
Pale Eucalypt	PE	
Ceiling Detail	Raked Ceiling	RC
	Flat Ceiling	FC
Drop Length	Custom (Specify distance from ceiling to bottom of pendant)	__m

Timber

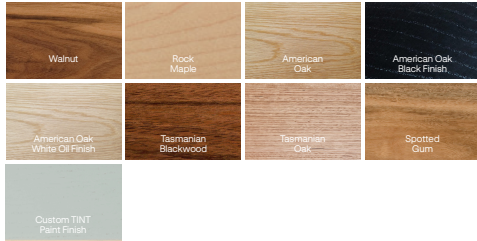


Dimensions

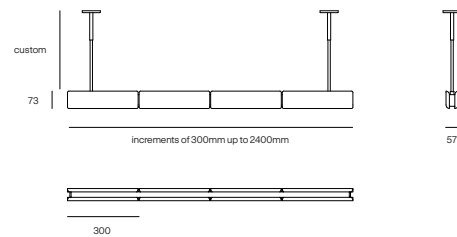


Array

Linear Pendant

Rod Locations

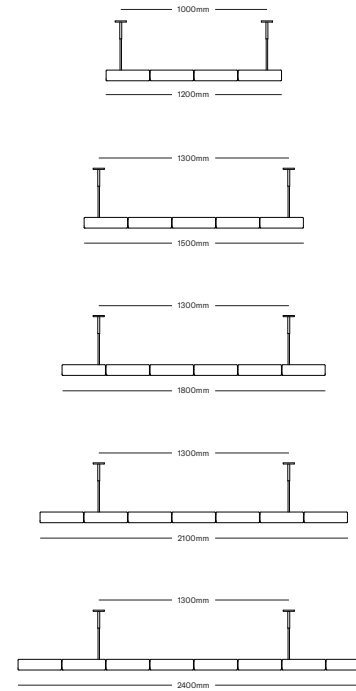


Ceiling Plate Options



Array

Linear Pendant

Rod Installation Guide

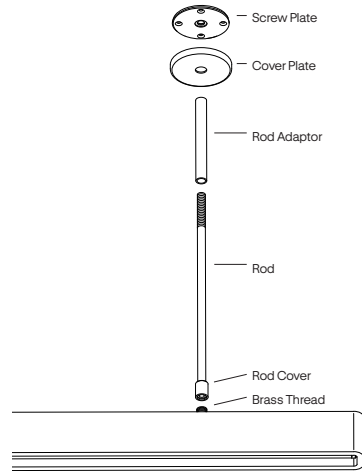

The rod assemblies will arrive packed separately. A brass thread is fixed to the pendant at the rod locations.


1. Install the rods onto the timber by threading the rod cover and rod onto the brass thread.
2. Install the screw plate to the ceiling. (The screw plate will arrive already fixed to the cover plate and rod adaptor). Ensure the appropriate fasteners are used for your ceiling substrate.
3. Complete the electrical terminations.
4. Lift the pendant up into the rod adaptors and screw the rods into each rod adaptor. (Adjust the height by twisting the rod, allowing the threads to engage well).

*There is 20mm of height adjustment within the threads. You may have to lift the fitting slightly to spin the rods.

*When levelling the pendant - watch for exposed thread between the rods and rod adaptor, this is sign of the bottom limit of the adjustment. Ensure the rod is screwed in at least 10mm from initial insertion.

5. Test installation meets the requirements of AS/NZS 3000.


Ceiling Plate Details



Small Plate
Ø76 x 8mm

Suitable for full ceiling access to place the remote driver from above.

Cutout hole: 10-20mm



Large Plate
Ø106 x 8mm

Suitable for limited ceiling access to place the remote driver from below.

Cutout hole: 60mm