

Umber

Linear Pendant

Umber is a low-glare linear pendant designed for perfectly illuminating kitchen islands.


Technical Details	
Dimensions	45w x 60h (mm)
Material	Solid Hardwood, Aluminium, Opal Acrylic, Integral LED Lighting
CRI	90
Wattage	14.4W per metre
Voltage	24V DC
Lumens	1700lm per metre
Install	Installed with a remote driver. Must be installed by a licensed electrician.
Dimming	Phase Cut (Universal Dimming) DALI
Warranty	3 Years

Create a Custom Umber Pendant


Design	Umber	UP
Timber	Walnut	WA
	Rock Maple	MA
	American Oak	AO
	American Oak - Black Finish	AOB
	American Oak - White Oil Finish	AOO
	Tasmanian Blackwood	TB
	Tasmanian Oak	TO
	Spotted Gum	SG
	Custom Tint Colour	TINT
	Length	900mm
1200mm		L12
1500mm		L15
1800mm		L18
2000mm		L20
2200mm		L22
2400mm		L24
2500mm		L25
2800mm		L28
3000mm		L30
LED Colour Temperature	2700K	27K
	3000K	3K
	4000K	4K
Dimming Type	Phase-Cut	PH
	DALI	DD
Ceiling Plate	Small Plate Ø76	76
	Large Plate Ø106	106
Ceiling Plate & Rod Colour	Black	B
	White	W
	Gold Pearl	GP
	Pale Bronze	PB
	Medium Bronze	MB
	Aged Brass	AB
Ceiling Detail	Raked Ceiling	RC
	Flat Ceiling	FC
Drop Length	Custom (Specify distance from ceiling to bottom of pendant)	...m



Timber

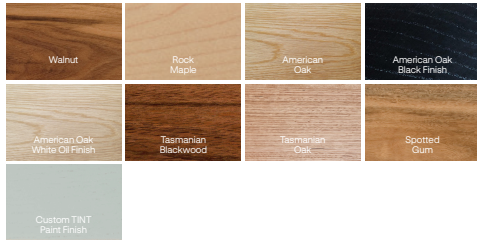


Dimensions

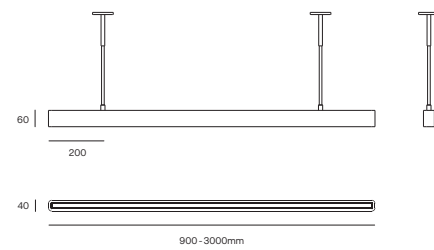

Umber

Linear Pendant

Rod Installation Guide

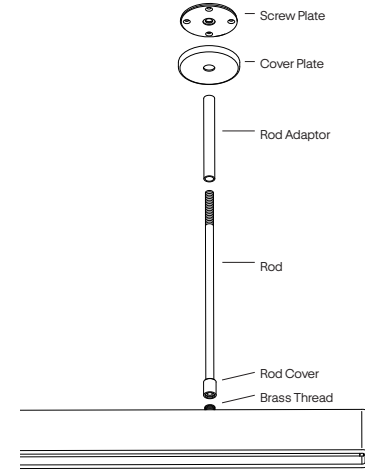


The rod assemblies will arrive packed separately. A brass thread is fixed to the timber at the rod locations.

1. Install the rods onto the timber by threading the rod cover and rod onto the brass thread.
2. Install the screw plate to the ceiling. (The screw plate will arrive already fixed to the cover plate and rod adaptor). Ensure the appropriate fasteners are used for your ceiling substrate.
3. Complete the electrical terminations.
4. Lift the pendant up into the rod adaptors and screw the rods into each rod adaptor. (Adjust the height by twisting the rod, allowing the threads to engage well).


*There is 20mm of height adjustment within the threads. You may have to lift the fitting slightly to spin the rods if heavy.

*When levelling the pendant - watch for exposed thread between the rods and rod adaptor, this is sign the rod is about to fall out. Ensure the rod thread is engaged enough into the rod adaptor.

Ceiling Plate Details



Small Plate
Ø76 x 8mm
Suitable for full ceiling access to place the remote driver from above.
Cutout hole: 10-20mm



Large Plate
Ø106 x 8mm
Suitable for limited ceiling access to place the remote driver from below.
Cutout hole: 60mm